


■Features

- High Luminous LEDs
- 8mm Standard Directivity
- White Diffused Type
- Common Cathode Type

■Applications

- Backlight
- Interior Lighting
- PCBA Products

■Outline Dimension

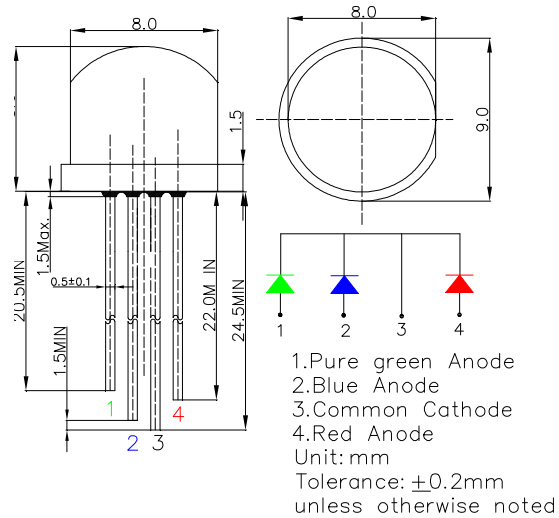


■Absolute Maximum Rating (Ta=25°C)

Item	Symbol	Value		Unit
		Red	Green/Blue	
DC Forward Current	I_F	30	30	mA
Pulse Forward Current#	I_{FP}	100	100	mA
Reverse Voltage	V_R	5	5	V
Power Dissipation	P_D	78	102	mW
Operating Temperature	T_{opr}	-30 ~ +85		°C
Storage Temperature	T_{stg}	-40 ~ +100		°C
Lead Soldering Temperature	T_{sol}	260°C/5sec		-

#Pulse width Max.10ms Duty ratio max 1/10

■Directivity

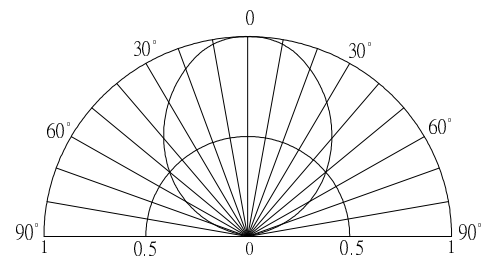

■Electrical -Optical Characteristics (Ta=25°C)

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
DC Forward Voltage*1	$V_F(R)$	$I_F=20mA$	-	2.1	2.6	V
	$V_F(G/B)$	$I_F=20mA$	-	2.9	3.4	V
DC Reverse Current	I_R	$V_R=5V$	-	-	10	μA
Domi. Wavelength*2	$\lambda_D(Red)$	$I_F=20mA$	620	625	630	nm
	$\lambda_D(Green)$	$I_F=20mA$	520	525	530	nm
	$\lambda_D(Blue)$	$I_F=20mA$	465	470	475	nm
Luminous Intensity*3	$I_V(Red)$	$I_F=20mA$	500	750	-	mcd
	$I_V(Green)$	$I_F=20mA$	750	1120	-	mcd
	$I_V(Blue)$	$I_F=20mA$	220	330	-	mcd
50% Power Angle	$2\theta_{1/2}$	$I_F=20mA$	-	100	-	deg

*1 Tolerance of measurements of forward voltage is $\pm 0.1V$

*2 Tolerance of measurements of dominant wavelength is $\pm 1nm$

*3 Tolerance of measurements of luminous intensity is $\pm 15\%$