

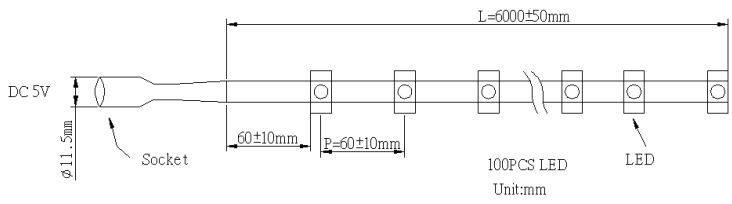


Descriptions	Product Picture
<p>LED Waterproof Light, <b>IP67</b>            High lumen output            Long life &amp; safe            Easy to stall, flexible &amp; sturdy wire            Voltage available in DC 5V            LED Type: SMD LED, 2.0x2.5mm, 120deg            Enamelled copper wire, could be DIY into different shapes</p>	<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>LIGHT NO</p>  </div> <div style="text-align: center;"> <p>LIGHT OFF</p>  </div> </div>

### Typical Performance (Ta=25°C)

Item	Symbol	Min.	Typ.	Max.	Unit	Product Dimensions:
LED Module Power	Pm	-	3.75	6.0	w	
Input Voltage(DC)	Vi	-	5.0	6.0	V	
Input Current	If	-	0.75	1.0	A	
Beam Pattern	BP	-	120	-	Deg	
Operating Temperature	Tope	-10 ~ +40			DegC	
Storage Temperature	Tsto	-20 ~ +80			DegC	

### Device Selection Guide

Item No.	Color	CCT(K)/WD(nm) (Typ.)	Luminous Flux Per String(Typ.)	LED Qty (Pcs)	Pitch (mm)	Length (mm)	Input Power (DC)
OSWSM51006B-5V	Warm White	3000K	100 lm	100	60	6000	5V
OSWSW51006B-5V	White	20000K	100 lm				
OSWSB51006B-5V	Blue	465±5nm	40 lm				
OSWSG51006B-5V	Pure Green	525±5nm	100 lm				
OSWSR51006B-5V	Red	625±5nm	60 lm				

### Product Roadmap

