


■ **Features**

- High Luminous Flux
- 3mm Round Standard Directivity
- UV Resistant Epoxy
- Water Clear Type

■ **Applications**

- Electronic Signs and Signals
- Small Area Illuminations
- Back Lighting
- Other Lighting

■ **Outline Dimension**

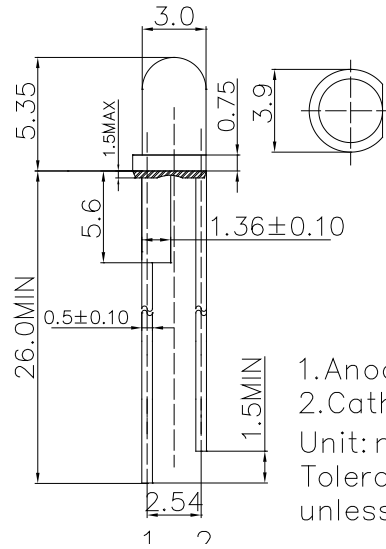


■ **Absolute Maximum Rating**

(Ta=25°C)

Item	Symbol	Value	Unit
DC Forward Current	I _F	80	mA
Pulse Forward Current#	I _{FP}	120	mA
Reverse Voltage	V _R	5	V
Power Dissipation	P _D	288	mW
Operating Temperature	T _{opr}	-30 ~ +85	°C
Storage Temperature	T _{stg}	-40 ~ +100	°C
Lead Soldering Temperature	T _{sol}	260°C/5sec	-

■ **Directivity**

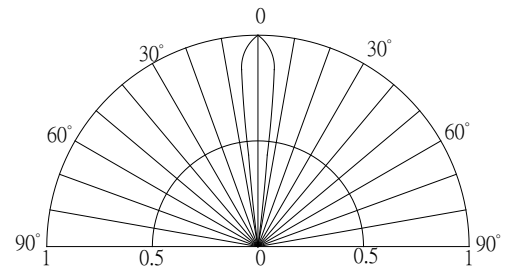

#Pulse width Max.10ms Duty ratio max 1/10

■ **Electrical -Optical Characteristics**

(Ta=25°C)

Part Number	Color			V _F (V)			I _R (μA)	Φ _V (LM)			I _v (mcd)			Wd(nm)/CCT(K)			2θ1/2(deg)
				Min.	Typ.	Max.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	Typ.
				I _F =75mA			V _R =5V			I _F =75mA							
OSW57L3A11P	Cool White	W		-	3.2	3.6	10	18	20	-	72000	85000	-	8500-18000K(X:0.27,Y:0.28)			15
OSW47L3A11P	Pure White	W		-	3.2	3.6	10	18	20	-	72000	85000	-	5500-8500K(X:0.31,Y:0.34)			15
OSM57L3A11P	Warm White	M	■	-	3.2	3.6	10	17	19	-	72000	85000	-	2700-3200K(X:0.44,Y:0.41)			15
OSB56L3A11P	Blue	B	■	-	3.2	3.6	10	4	5	-	36000	43000	-	465	470	475	15
OSG59L3A11P	Pure Green	PG	■	-	3.2	3.6	10	15	18	-	120000	140000	-	520	525	530	15

*1 Tolerance of measurements of chromaticity coordinate is ±10%

*2 Tolerance of measurements of dominant wavelength is ±1nm

*3 Tolerance of measurements of luminous flux is ±15%

*4 Tolerance of measurements of forward voltage is ±0.1V

