


**■Features**

- High Lumen LEDs
- 5mm Flat Top Standard Directivity
- UV Resistant Epoxy
- Water Clear Type

**■Applications**

- Traffic Signal
- Backlighting
- Signal and channel letter
- Other Lighting

**■Outline Dimension**

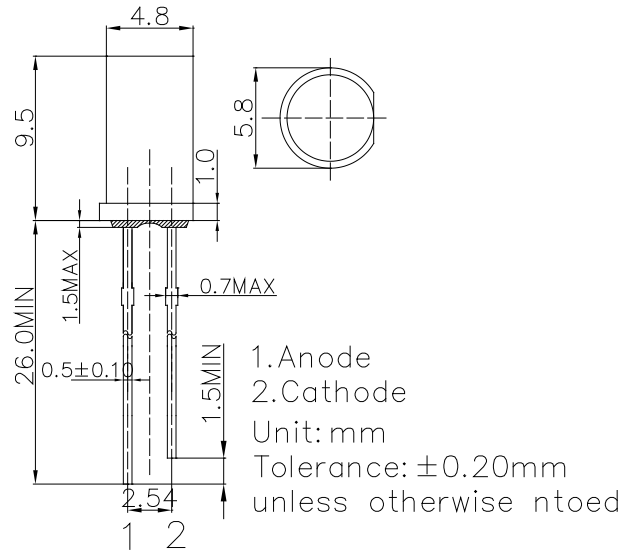


**■Absolute Maximum Rating**

(Ta=25°C)

Item	Symbol	Value		Unit
		W/M/B/PG	Y/O/R	
DC Forward Current	I <sub>F</sub>	30	30	mA
Pulse Forward Current#	I <sub>FP</sub>	100	100	mA
Reverse Voltage	V <sub>R</sub>	5	5	V
Power Dissipation	P <sub>D</sub>	102	78	mW
Operating Temperature	T <sub>opr</sub>	-30 ~ +85		°C
Storage Temperature	T <sub>stg</sub>	-40 ~ +100		°C
Lead Soldering Temperature	T <sub>sol</sub>	260°C/ 5sec		-

**■Directivity**

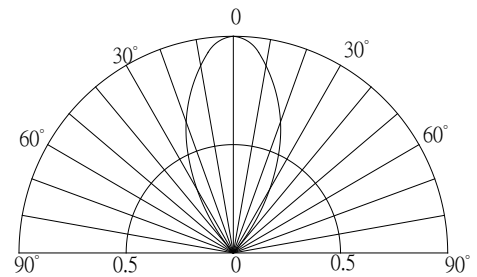

#Pulse width Max.10ms Duty ratio max 1/10

**■Electrical -Optical Characteristics**

(Ta=25°C)

Part Number	Color			V <sub>F</sub> (V)			I <sub>R</sub> (μA)	Φ <sub>v</sub> (LM)			I <sub>v</sub> (cd)			Wd(nm)/CCT(K)			2θ1/2(deg)
				Min.	Typ.	Max.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	Typ.
				I <sub>F</sub> =30mA			V <sub>R</sub> =5V			I <sub>F</sub> =30mA							
OSW44P5T51A	Pure White	W	-	2.9	3.4	10	8.5	10	-	3.0	4.2	-	5500-8500K(X:0.31,Y:0.33)			50	
OSM54P5T51A	Warm White	M	■	2.9	3.4	10	8.5	10	-	3.0	4.2	-	2700-3200K(X:0.44,Y:0.41)			50	
OSB56P5T51A	Blue	B	■	2.9	3.4	10	2.5	3.0	-	1.12	1.56	-	465	470	475	50	
OSG5GP5T51A	Pure Green	PG	■	2.9	3.4	10	8.5	10	-	3.0	4.2	-	520	525	530	50	
OS5YKP5T51A	Yellow	Y	■	2.1	2.6	10	3.5	4.5	-	1.56	2.18	-	585	590	595	50	
OS5OKP5T51A	Orange	O	■	2.1	2.6	10	3.5	4.5	-	1.56	2.18	-	600	605	610	50	
OS5RKP5T51A	Red	R	■	2.1	2.6	10	3.5	4.5	-	1.56	2.18	-	620	625	630	50	

\*1 Tolerance of measurements of chromaticity coordinate is ±10%

\*2 Tolerance of measurements of dominant wavelength is ±1nm

\*3 Tolerance of measurements of luminous flux is ±15%

\*4 Tolerance of measurements of forward voltage is ±0.1V